

plas-aid


The reliable choice in portable dehumidifying dryers.

PERFORMANCE

PORTABILITY

DURABILITY

DMZ2 SERIES



Introducing the

DMZ2 Dehumidifying Dryer.

Versatile, high performance

in a compact, portable design.

Only from Matsui.

DMZ2 SERIES

Take a look at what the new DMZ2 offers:

PACKED WITH PERFORMANCE

The DMZ2 is the ideal dehumidifying dryer to integrate with your central loading system or to handle multiple hoppers. It offers more features as standard equipment with a smaller footprint than comparable systems, giving you maximum performance in minimal space.

VIRTUALLY MAINTENANCE-FREE

The DMZ2's rotor has a 15-year life, designed to run without replacement. Heater circuits have solid-state relays, providing 10 years of maintenance-free operation. Routine maintenance can be performed from the front of the system, quickly and easily.

IDEAL FOR PET BOTTLE PRODUCTION

The ideal unit when exceptional quality is imperative, the DMZ2 maintains stable IV and low AA levels, and brings moisture content below 50 ppm. It can dry PET in as little as 3 hours and has throughput up to 1500 kg/hr and larger.

HIGH PERFORMANCE HOPPER DESIGN

The DMZ2's drying hopper uses a unique diffuser-cone technology to create mass flow with no short pass. This ensures all resin leaving the hopper is consistently dry and up to temperature. Smaller units have a tilt-open feature to make cleanups and resin-changes fast and easy.



TOUCHPAD PROGRAMMING

An easy-to-use touchpad simplifies programming, enabling you to preset operations, monitor settings, view progress and make changes effortlessly.

ENERGY-SAVING PRODUCTION


Insulated stainless steel construction prevents heat loss, and while drying resin in half the time, it saves hours of energy with every material change.



Constant dry heat for the best drying environment.


NOW IN A COMPACT PORTABLE DESIGN.

Desiccant rotor technology cuts drying time

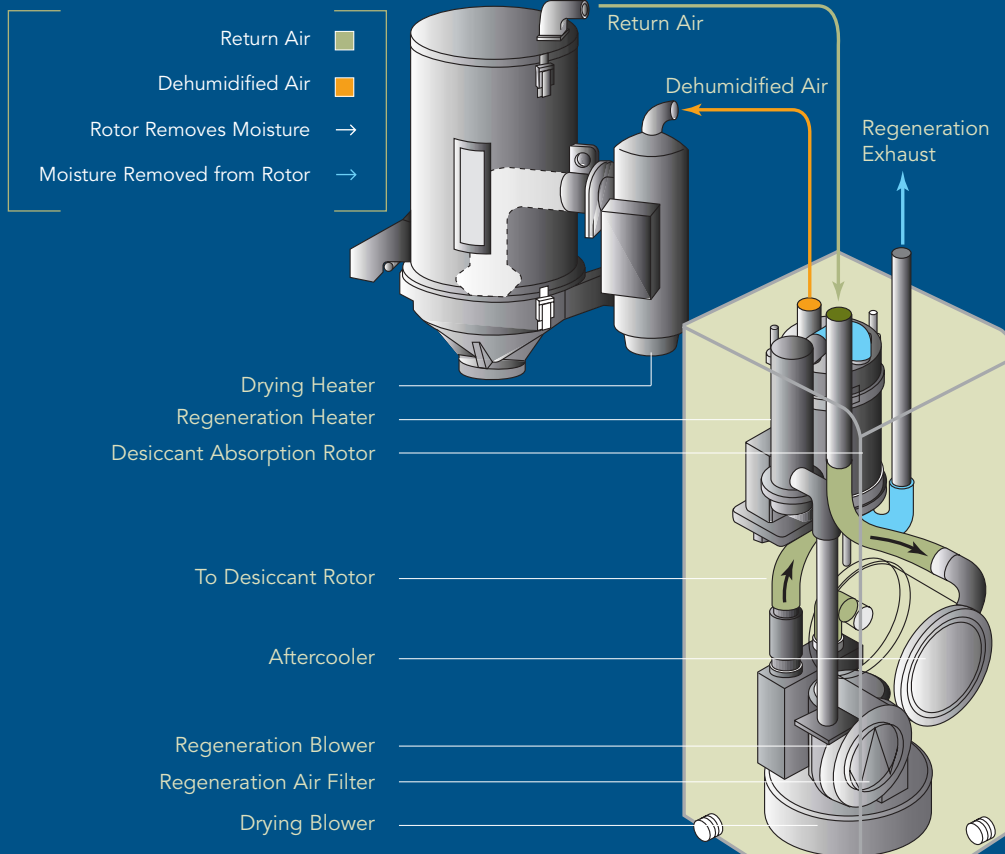

Matsui's desiccant rotor technology has become the industry standard in dehumidifying hot-air drying equipment. Its unique, honeycomb design—molecular sieve desiccant, bonded and then baked onto ceramic paper—eliminates powder that can contaminate the system. Its large contact area effectively absorbs at high temperatures, drying resin in half the time while stabilizing dew points at a constant -40°F .

THE STREAM OF AIR INSIDE THE ROTOR

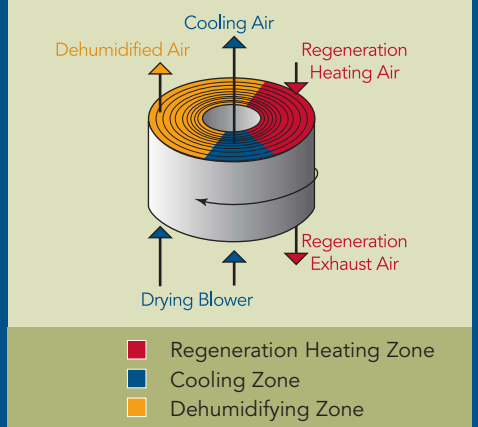


Compare Matsui to the competition:

THE DMZ2 DRIES RESIN FASTER.

Resin	Other Dryers	Desiccant Dryers
Polycarbonate	3-4 hours	1.5 hours
Nylon	4-6 hours	2.5 hours
PET	6-8 hours	3.0 hours


AND IT STABILIZES DEW POINTS.

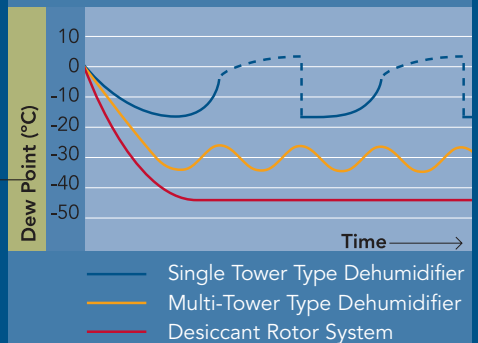

DMZ2 SERIES SPECIFICATIONS

DMZ2 MODEL	40U	80U	120U	170U	240U
DEW POINT (°F)	-40				
AIRFLOW (CFM)	23	47	70	106	165
AVAILABLE HOPPERS (LBS.)	33 or 55	110	165, 220 or 330	330 or 440	550 or 660
HOPPER VOLUME (FT ³)	0.88 or 1.4	3.0	4.4, 6.0 or 8.8	4.4 or 12.0	14.8 or 17.6
DRYING BLOWER (KW)	.50	.85	1.55	1.75	2.55
REGENERATION BLOWER (KW)	.057	.113		.420	1.15
DRYING HEATER (KW)	1.5 (2.1H)	2.4 (4.0H)	3.3 (6.0H)	4.0 (7.8H)	6.0 (12.4H)
REGENERATION HEATER (KW)	1.5	2.4	3.1	5.8	7.7
ABSORBENT	Zeolite rotor				
ABSORBENT MOTOR (KW)	.015				
AFTERCOOLER FLOW (GPM)	1.5	3.7	4.0		5.2
AFTERCOOLER CONNECTION (INCHES)	3/8"				
CONTROL	Microprocessor w/PID Heating				
AUTO START TIMER	Range: 10-min to 99hrs 50min				
ALARM & PROTECTION	Overheat, Thermal Trip, Reverse Phase, Automatic Cool Down				
POWER SUPPLY (VOLTS)	230V or 460V 3ph, 60Hz				
MAXIMUM TEMPERATURE	266°F (H-356°F)				
BREAKER-AMPS (230/460V)	20/20	30/40	40/50	50/30	75/40
HI-TEMP MODEL				60/40	100/50
WEIGHT (LBS)	264	352	440	760	800
APPROXIMATE DIMENSIONS (INCHES)	17 x 22 x 52H	20 x 28 x 53H		31 x 35 x 72H	
AVAILABLE OPTIONS	Weekly Timer, Dew Point Meter, Filter Alarm, Floor Frame, V-Box, Insulated Hopper				

Portable Dryer Dimensions LxWxH (inches)		
DMZ2-40-15	37 x 27 x 56H	
DMZ2-40-25	37 x 31 x 62H	
DMZ2-80-50	45 x 31 x 72H	
DMZ2-120-75	45 x 34 x 72H	
DMZ2-120-100	45 x 34 x 78H	
DMZ2-120-150	50 x 44 x 84H	
DMZ2-170-150	67 x 44 x 84H	
DMZ2-170-200	67 x 44 x 94H	
DMZ2-240-250	67 x 47 x 96H	
DMZ2-240-300	67 x 47 x 102H	

Outer Dimensions of Hopper Dryer (inches)				
MODEL	A	B	C	
HD-15	11	24	25	
HD-25	16	30	36	
HD-50	16	30	46	
HD-75	20	33	45	
HD-100	20	33	53	
HD-150	26	42	55	
HD-200	26	42	64	
HD-250	31	48	65	
HD-300	31	48	71	



Matsui America
www.matsuiamerica.com

CHICAGO HEADQUARTERS

1250 West Lunt Avenue | Elk Grove Village, IL 60007 | T 847-290-9680 | F 847-290-9685

LOS ANGELES OFFICE

1240 North Lakeview, Suite 180 | Anaheim, CA 92807 | T 714-693-1101 | F 714-693-1345